


Customer approval :


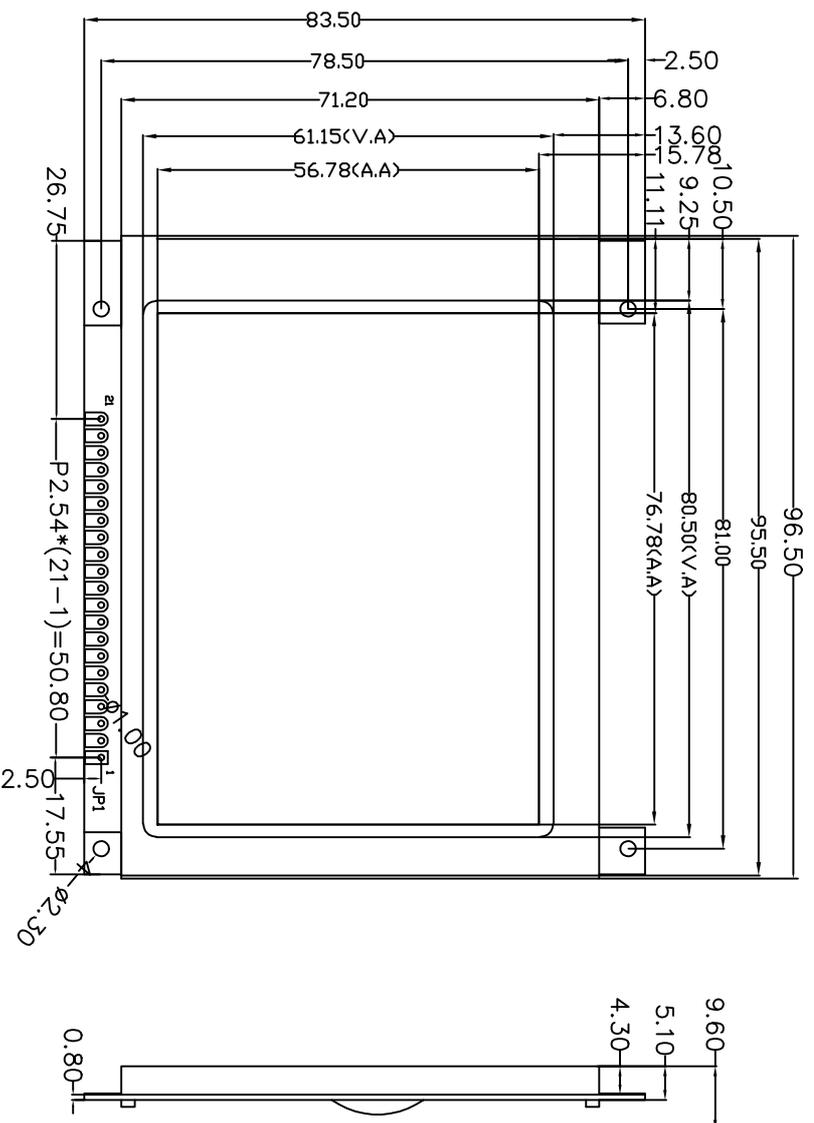


SPECIFICATION:

- 1). Driving:Dots:320\*240, Duty:1/240, Bias:1/17, VOUT:25.30V, V0:23.30V, VDD:5V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: FSTN/Transflective/Positive
- 4). Operating temp.: -20° C~+70° C  
Storage temp.: -30° C~+80° C
- 5). Control IC: RA8835AP3N
- 6). BACKLIGHT Type: White
- 7). DIMENSIONS WITH MARK "\*" ARE IMPORTANT  
WITH MARK "()" ARE REFERENCED
- 8). All the raw materials are RoHS compliant

JP1

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
SEL1	RST	RD	WR	AO	/CS	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VDD	V0	VOUT	GND	BLK	BLA	NC



REV	REVISION RECORD	DATE	TCC® 深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd.																	
A0	First issue	04/10	MODEL NO.	SYT320240EV1-5C2K1UN6R-BSNZ													GENERAL TOL: ±0.3			
			APPROVED BY	CHECKED BY	DRAWING BY	PAGE 1 OF 3 UNIT: mm														
					LAN	PROJECTION 三 角														